


Price List
 gültig ab 01.01.2012


Storage Tank / Sugar Dissolving Tank with Cooling and Heating Jacket, with Insulation - 50.492 Litres in AISI 304 - **NEW**
Price: Euro 47.400,-- / unit

Catalogue-Nr 12-2260L


available: 1 unit

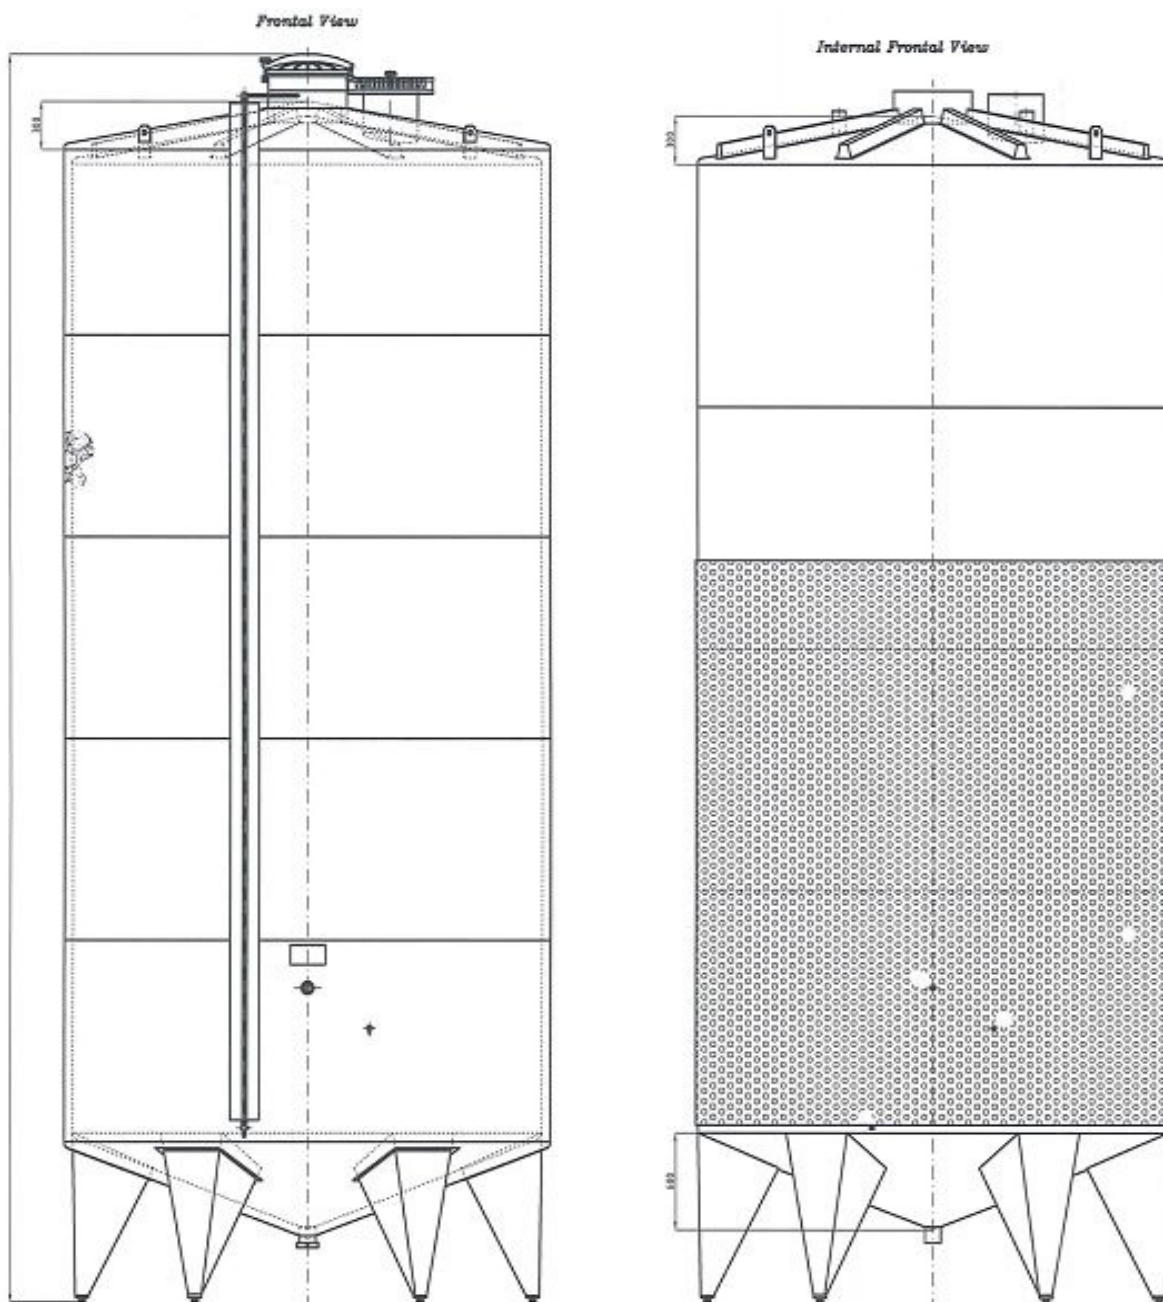


Top View

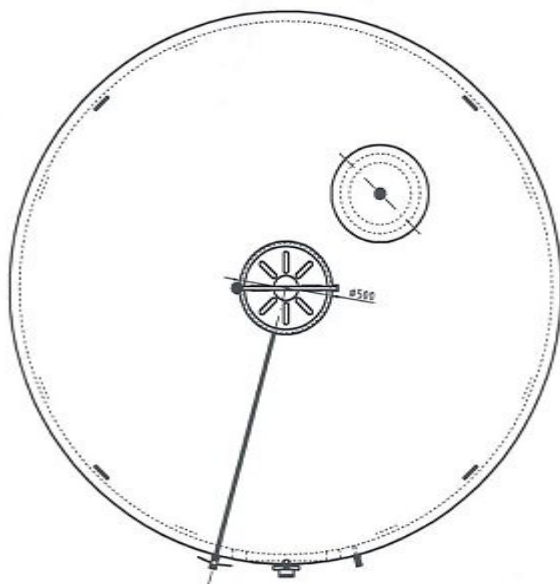


Internal Top View

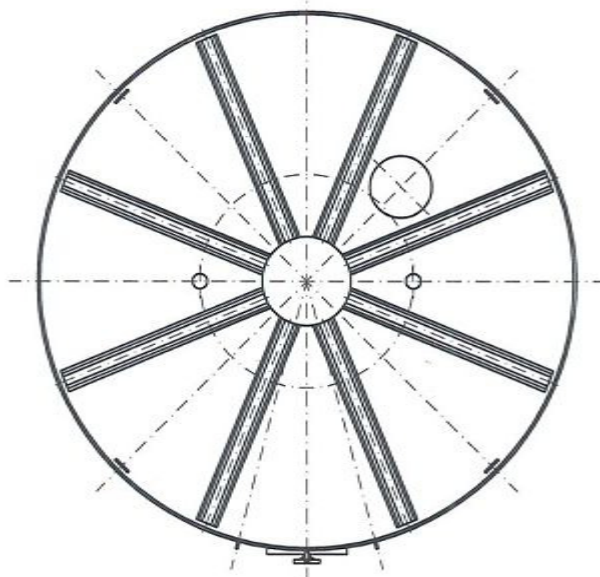

Bottom View

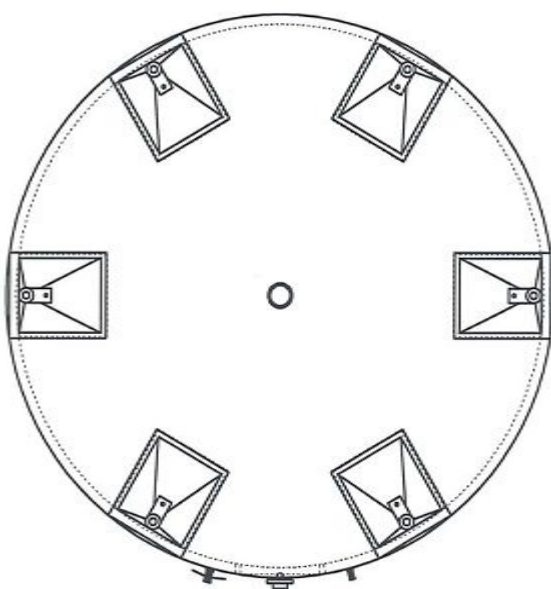

Internal Bottom View

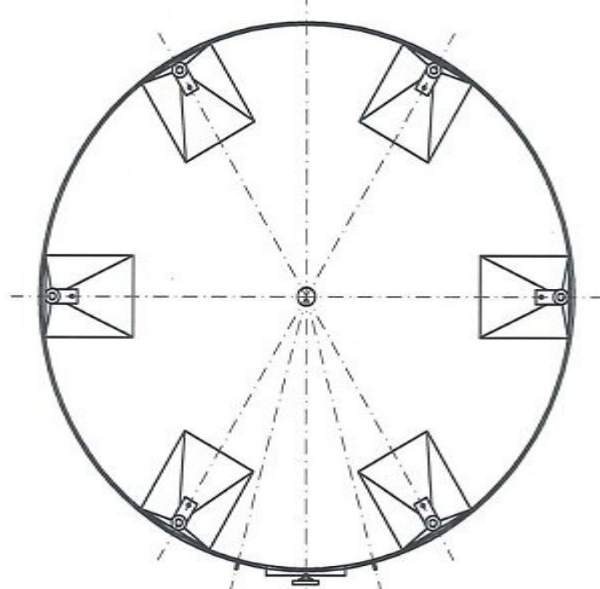

Technical Details Measurements(mm)	Inside		Insulation	
	Total Height	Diameter	Total Height	Diameter
	Height	Thickness	Height	Thickness
Upper Bottom	300	3.0	300	1.5
Cylinder Tank	8000	5.0 / 4.0 3.0 / 2.5	8100	1.5
Lower Bottom	600	7.0	600	1.5
Feet	1000	5.0	-	-

Product Thickness: 1,4 kg / Ltr – 65 °C

Working Pressure: pressureless

Capacity: 50.492 Litres

Material: V2A - AISI 304

Surface: 2B welding inside polished

Insulation: in mineral wool thickness = 50 mm, completely in stainless steel and welded

Thermoplate/Cooling Jacket H=5500 mm Thickness: 2.0 mm

Working Pressure (Thermoplate/Cooling Jacket): max. + 3.0 bar – Medium: Water

Upper and Lower Bottom: conical shape

With manhole lid Diameter: 500 mm

With in and outlet air controll

With level indicator with borosilicate, scale

With sample valve

With spray head diameter 65 mm demountable with CIP pipe till the bottom of the cylinder + thread connector NW 80

With butterfly valve DN 65 for clear outlet

With butterfly valve DN 65 for waste outlet

8 bottom plates M40

All prices are valid Ex-Works, excl.VAT

Freight Charges: depending on dimensions and destination

Delivery: from D-97753 Karlstadt-Karlbürg

Subject to prior sale

Visit our Web-Site under:

www.eurolux-ag.com