

Preisliste
 valid from 01.01.2013

Storage Tank 920 Litres with cooling jacket in AISI 304
NEW, incl. TÜV Certificate

Price: Euro 8.270,--/unit

Cat-No 13-0392L

available: 1 unit

Standard Features:

Total Height: 2460 mm

Body Height: 1900 mm
weight: approx.. 240 kg

Diameter: 850 mm

max.working pressure product space: 6 bar
 max.working pressure cooling jacket: 1 bar
 max.working temperature to °C: 130
 Year of construction: 2013

Material of tank: 1.4301
 Manufacturer's serial number: 00770
 Order number: 765661
 Surface inside: III C




Eurolux GmbH Hessheimer Weg 3-7 D-97753 Karlstadt bei Würzburg Germany Tel. 0 93 53 / 90 90 50 Fax 0 93 53 / 90 90 522 E-mail: info@eurolux.de · www.eurolux-ag.com		EURO <i>lux</i>	
Fassungsraum in Liter bei 10 °C	920	Werkstoff des Tank	1.4301
zul. Betriebsüberdruck Produktraum	6 bar	Seriennummer des Herstellers	00770
zul. Betriebsüberdruck Kühlmantel	1 bar	Auftrags-Nummer	765661
zul. Betriebstemperatur in °C	130	Oberfläche innen	III c
Baujahr	2013		



EUROLUX GmbH
 Industriegebiet-Hessheimer Weg 3-7
 D-97753 Karlstadt-Karlbürg (b.Würzburg)
 Tel. +49 (0) 93 53 – 9 09 05 – 0
 Fax. +49 (0) 93 53 – 9 09 05 – 22

Sitz der Gesellschaft: Würzburg
 Registergericht: Amtsgericht Würzburg
 HRB Nr. 4983 • Geschäftsführung: Paul Lamprecht
 Gerichtsstand: Würzburg
 Ust-IdNr. DE 811 655 121
info@eurolux.de

Sparkasse Mainfranken Würzburg
 BLZ 790 500 00
 Konto-Nr. 190 012 336
 S.W.I.F.T-Code BY LA DE M1 SWU
 IBAN DE 56 7905 0000 0190 0123 36
www.eurolux-ag.com

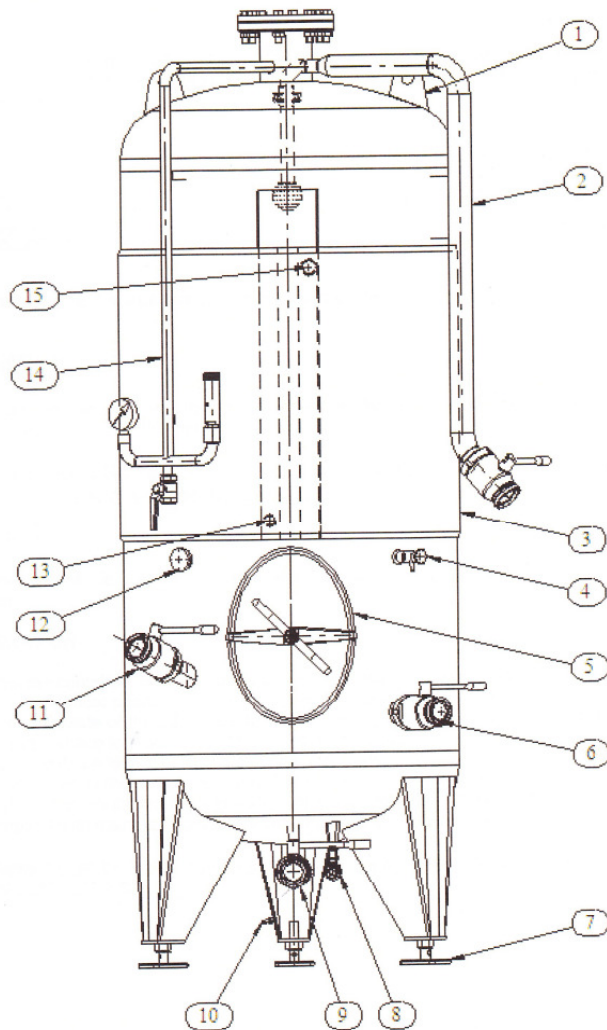

1. eye hooks
2. washing system
3. cooling jacket
4. sample valve 1/2"
5. manhole oval 350 x 445 mm
6. discharge valve DN 50
7. height adjustable feet
8. CO²-connection
9. rest outlet DN 50
10. grounding
11. Connection DN 50 for stirrer
12. thermometer probe 1/2"
13. nozzle 1" for the cooling fluid - entrance
14. pipe for exit of gas, equipped with pressure gauge and safety valve
15. Nozzle 1 1/4" for the cooling fluid -output

upper bottom:

- connecting port Ø 245 mm

tank body:

- 3x thread connection with butterfly valve DN 50
- manhole oval 350 x 445 mm
- temperature indicator
- pressure gauge
- tap

lower bottom:

- pulled forward rest outlet with butterfly valve DN 50
- on 3 calotte feet

All prices are valid Ex-Works, excl.VAT

Freight Charges: depending on dimensions and destination

Delivery: from D-97753 Karlstadt-Karlbürg

Subject to prior sale

Visit our Web-Site: www.eurolux-ag.com